

Overview

HT13/122//8 is a cost effective horse fence which can be used in conjunction with post and rail or Tornado's Centaur range. The closely spaced vertical wires help prevent horses damaging their hooves by getting them stuck in the fence. Horse fencing often has to play a multifunctional role, not only securely containing your horse and any other animals who share their grazing, but also deterring domestic animals, such as dogs, from entering the paddock.

Compliance with British and European Standards

BSEN 10218 - Steel Wire and Wire Products part 2 - General Wire Dimensions and Tolerances.

BSEN 10223 - Steel Wire and Wire Products for Fencing and Netting part 5 - Steel Wire Woven Hinged Joint and Knotted Mesh Fencing.

BSEN 10244 - Steel Wire and Wire Products Non-ferrous Metallic Coatings on Steel Wire part 2 - Zinc or Zinc Alloy Coatings (all Tornado products galvanised to class A).

Sustainability

All Tornado products are 100% recyclable.

Traceability

This fence is batch marked and can be traced back to point of manufacture.

Installation Guidelines

A straining post is required at every major change in direction or any termination and should be supported by a strut or box assembly. Netting should be tied off on the straining posts by hand or with suitable joiners. When tensioning the fence the 'crimp' in the net should be reduced by approx: 50%. Avoid driving staples tight against the wire as this will damage the galvanised coating.

Health and Safety

It is recommended that safety gloves, boots and glasses are worn at all times when handling the product.

Suitable for

- Horses

Specification


No. of Line Wires	13
Overall Height (cm)	122
Distance between stay wires (cm)	8
Top & bottom line wire specification	2.5mm dia - 1235-1390 N/mm ²
Intermediate line wire specification	2.5mm dia - 1235-1390 N/mm ²
Vertical stay wire specification	2.5mm dia - 695-850 N/mm ²
Average Weight per 50 Metre Roll (kg)	72.04
Material Composition	Heavily galvanised steel wire

Product Codes


HZST131201	50 metre roll
HZST131205	100 metre roll
HZST131204	150 metre roll

All measurements are approximate. It is the user's responsibility to check the product is suitable for the application. We reserve the right to change specifications without notification.

Fence Layout Detail

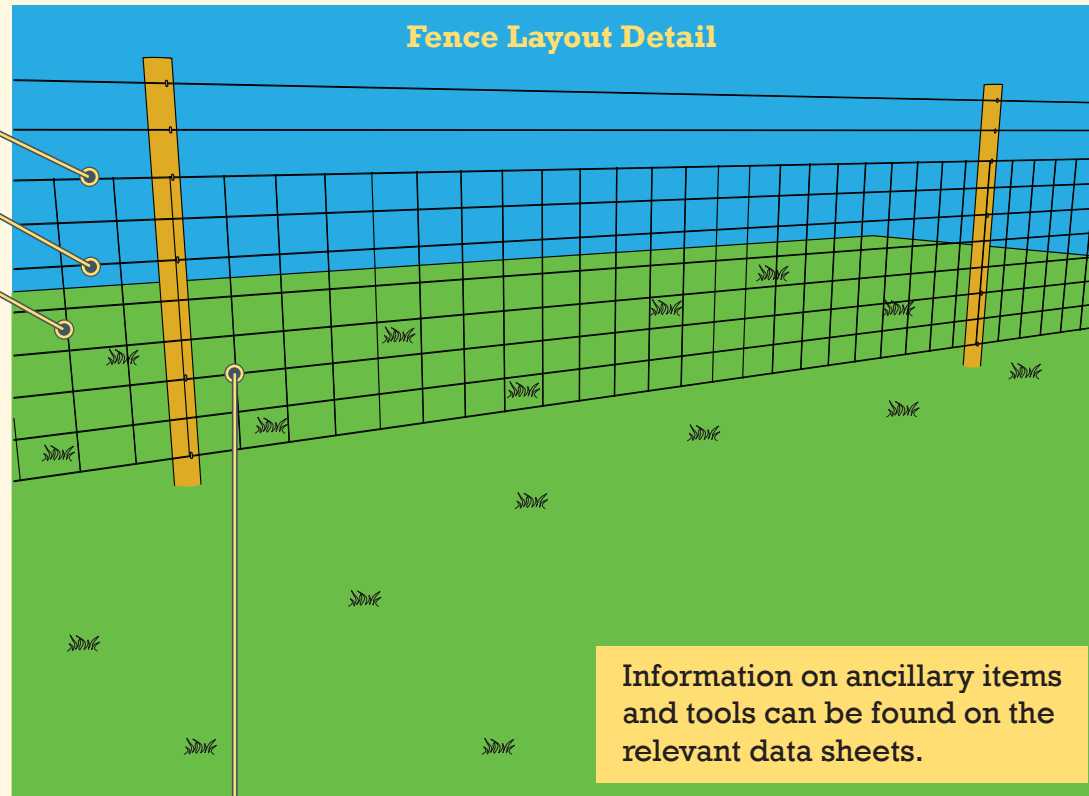

Line Wire Detail

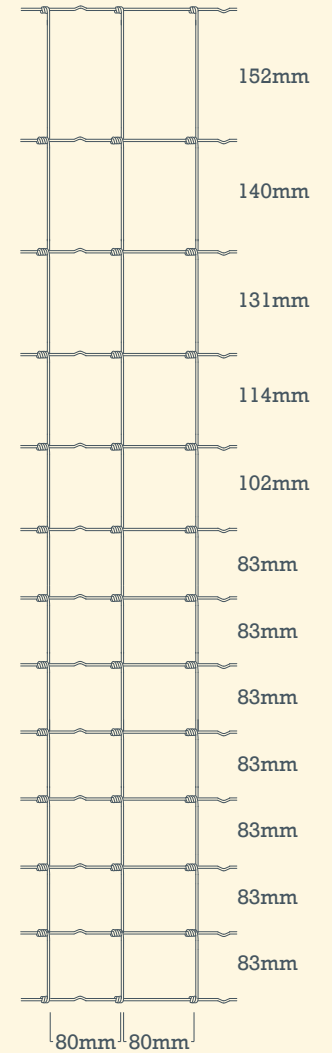


Top wire 2.5mm high tensile


Intermediate line wire 2.5mm high tensile

Vertical stay wire 2.5mm

Fence Configuration Detail

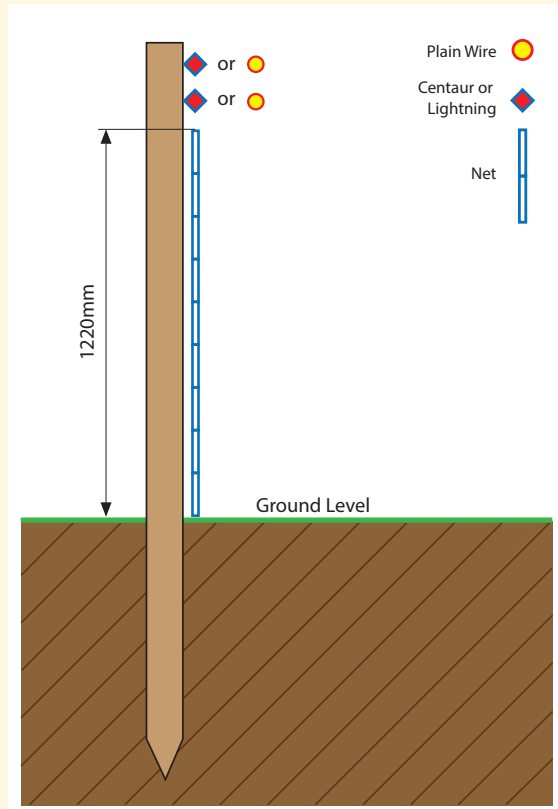

Hinge Joint



Traditional cost effective joint. Enables the netting to be turned out or cranked for use in special applications.

Related Products

- Plain wire
- Staples
- Range of fence installation tools
- Centaur